



FITTING THE COMPUTER



Place the positioning spacer under the computer bracket, with the lugs facing forwards.



Position the bracket unit on the handlebar in the most practical place for operating the computer.

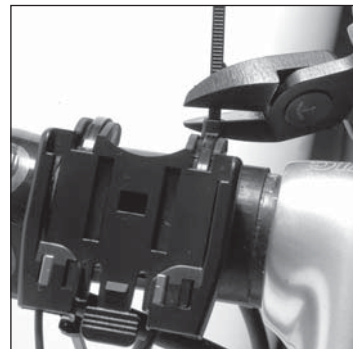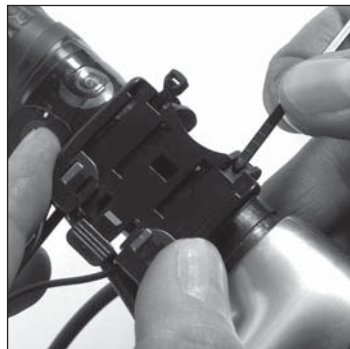

Insert two zip ties from the front of the bracket unit. Then tighten the zip ties around the handlebar and cut the excess lengths. Take care to check the angle of the bracket to ensure the computer screen can be easily seen when in the riding position.



Slide the computer in from the front of the bracket, until you hear the locking click.



To remove the computer, lower the small lever on the back of the bracket and slide the computer out towards the front of the bike.