



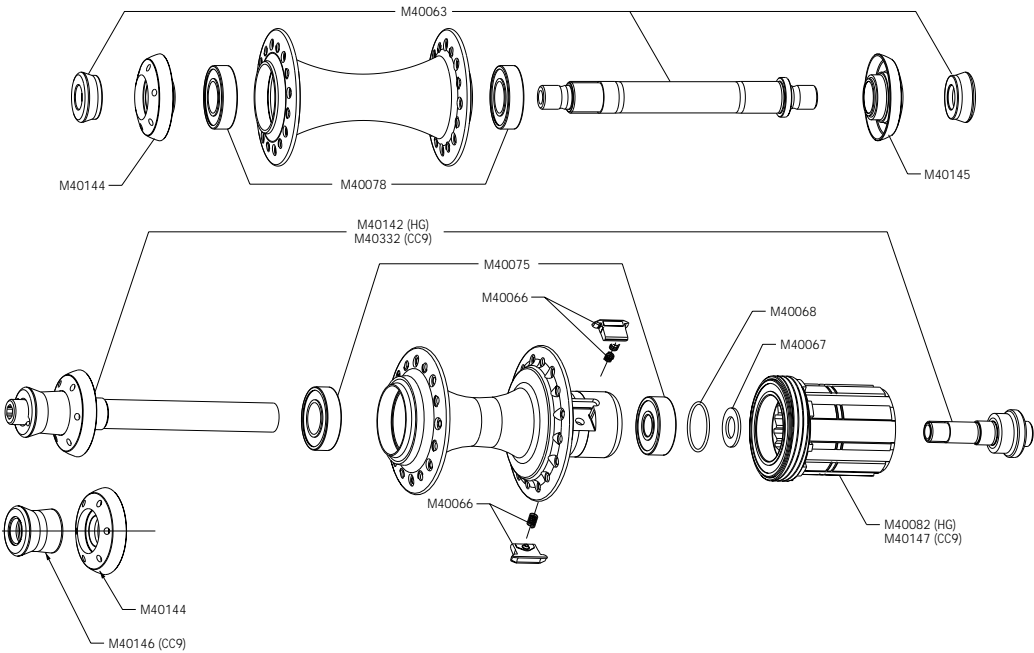




MR 601 HUB

WEIGHT	Front : 120 g (without skewer) - Rear : 335 g (without skewer).
FEATURES	<p>Hardened, polished anodized alloy body. Adjustable, replaceable sealed cartridge bearings.  Integrated free wheel FTS system. Steel free wheel body compatible with 8 and 9 speed HG (11 teeth) or 8 and 9 speed CC9 with the Mavic M9 cassette (starting 11 teeth) or 9 speed CC9 with the HG cassette and the HG / CC9 kit (starting 11 teeth). Aluminum alloy axle (front) and corrosion-resistant steel (rear). Delivered with the Mavic BR 601 skewers.</p>
SPACING	Front : 100 mm. / Rear : 130 mm.
DRILLING	<p>Front / Rear : 24 (special order) 28 - 32 - 36 holes. Drilling holes : - Ø : 2,5 mm. • beveled at 45°, 1 hole out of 2 and 1 side out of 2 (see diagram page 58). • Ø between 2 opposite holes: Front : 40 mm. / Rear left : 45 mm. / Rear right : 48 mm.</p>
FLANGE	<p>Between-flanges : Front : 73,2 mm Distance center to flanges : Rear left : 34 mm / Rear right : 17,4 mm (HG). Rear left : 35,2 mm / Rear right : 18,6 mm (CC9).</p>
INSTALLING THE CASSETTE	<p>8 OR 9 SPEED HG CASSETTE, 8 OR 9 SPEED MAVIC CC9 OR 9 SPEED HG WITH THE HG / CC9 KIT.</p>   
SPARE PARTS COMMERCIAL REFERENCES	 <p>Labels in diagram: M40144, M40063, M40078, M40145, M40142 (HG) / M40332 (CC9), M40075, M40066, M40068, M40067, M40082 (HG) / M40147 (CC9), M40146 (CC9).</p>
MAINTENANCE	<p>Cleaning : with a dry cloth or soap and water. Do not use pressurized water.</p> <p>Maintenance :</p> <ul style="list-style-type: none"> • Front axle kit page 38 • Rear axle kit page 41 • Front bearing kit page 43 • Rear bearing kit page 47 • Free wheel FTS kit page 46. <p>Bearing adjustment (lock the wheel to the frame and place the bike on the floor) : Put the adjustment nut on the external ring of the bearing with the hub wrench M40123. Repeat the procedure if the adjustment doesn't seem to be optimum. The MR 601 hub has been pre-adjusted at the factory for optimum use and long product life. However, free play can be modified. Free play misadjustments can damage the bearings on the hub or seriously alter their performance.</p>  
USE	<p>To be used exclusively on a road bike. Any other use (such as on a tandem, mountain bike...) is inadvisable and is the sole responsibility of the user, which voids the Mavic warranty.</p>