

COSMIC CARBONE PRO






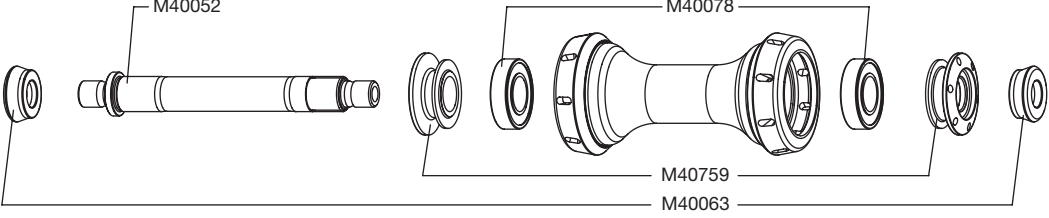
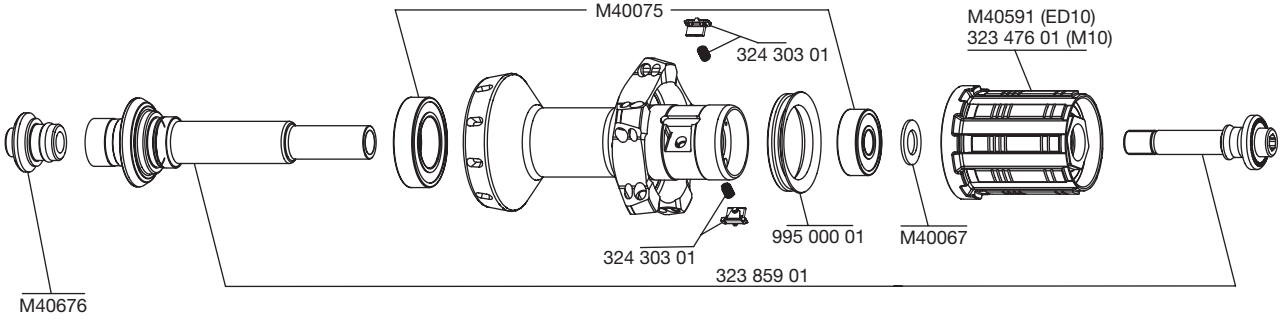
USE: use only on a road bike. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is strongly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

WHEEL WEIGHTS WITHOUT QUICK RELEASE SKEWER:

Front: 675 g
Rear M10: 835 g
Rear ED10: 850 g

WHEEL REFERENCES:

Front: 323 684 10
Rear M10: 323 685 11
Rear ED10: 323 686 12
Pair M10: 323 757 14
Pair ED10: 323 758 14

RIMS	SALES REFERENCES: Front: 323 851 10 Rear: 323 851 13	
WIDTH	VALVE HOLE Ø  Ø: 6,5 mm Length.: ≥ 32 mm	RECOMMENDED TIRE WIDTH AND PRESSURE  Dimensions: Ø 700 only ETRTO 622 compatible, for tubular tires only Recommended tubular width: 19 to 22
		
	When replacing the rear rim: 1. The "Made in France" label must be facing you, and the valve hole must be near you 2. The spoke in the first hole to the right of the valve hole should be inserted on the free wheel side	
	Gluing the tubular tire: Clean the rim tape using a cloth soaked in isopropyl alcohol (if unavailable, use acetone) Never scratch the carbon fiber, and don't use a knife, screwdriver or emery cloth Let the first layer of glue dry for at least 24 hours before gluing the tubular tire	
HUBS	MAINTENANCE: clean with dry cloth or soap and water Do not use pressurized water	
		
		
WHEEL BUILDING	REFERENCES AND LENGTHS: Front: 323 900 01, length 271 mm (per 8 with nipples) Rear free wheel side: 323 901 01, length 289 mm (per 10 with nipples) Rear non drive side: 323 902 01, length 270 mm (per 10 with nipples)	
FEATURES: Black, ultra bladed, stainless steel, straight pull spokes with reversed nipples to be glued (see page 18)	LACING PATTERN: Front: radial Rear: crossed 2 free wheel side, radial non-drive side	TENSION : Front: 110 to 140 kg Rear free wheel side: 140 to 165 kg
ACCESSORIES	WHEEL DELIVERED WITH:	MAINTENANCE
<ul style="list-style-type: none"> • BR 601 Titanium front quick release skewer: 323 485 01 • BR 601 Titanium rear quick release skewer: 323 486 01 • Spoke wrench 323 908 01 (with rear wheel) • Wrench for aerodynamic spokes M40567 (with rear wheel) • Computer magnet M40540 (with front wheel) • ED10 12D locking ring M40640 (with rear wheel ED10) • Free play adjustment wrench M40123 • Wheel bags M40135 • User guide and warranty card 		<ul style="list-style-type: none"> • Replacing a spoke See page 18 • Replacing the front rim See page 18 • Replacing the rear rim See page 19 <p>For all hub related maintenance procedures, refer to the 2005 technical manual (Cosmic Carbone SL section), or consult the website www.tech-mavic.com</p>