


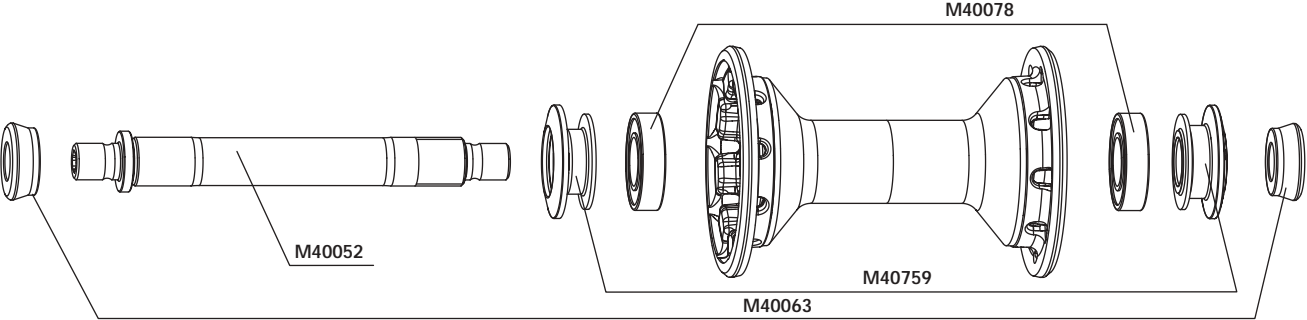
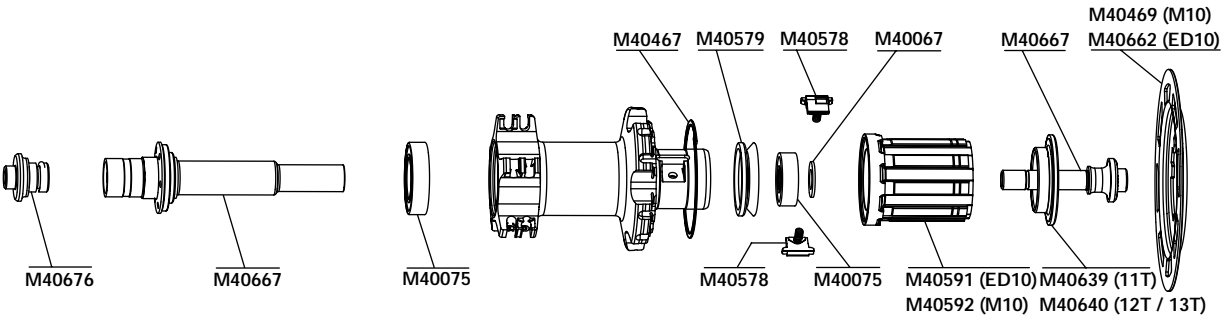



KSYRIUM™ SSC SL

USE : Use only on a road bike. Any other use (such as on a tandem, cyclo-cross bike, mountain bike...) is strongly inadvisable, and is the sole responsibility of the user, which voids the Mavic warranty.

WHEEL WEIGHT WITHOUT SKEWER :			
CLINCHER : Front :	660 g	TUBULAR : Front :	650 g
Rear M10 :	840 g	Rear M10 :	830 g
Rear ED10 :	820 g	Rear ED10 :	810 g

CLINCHER WHEEL REF:	TUBULAR WHEEL REF:		
Front :	323 306 10	Front :	323 388 10
Rear M10 :	323 307 11	Rear M10 :	323 389 11
Rear ED 10 :	323 308 12	Rear ED10 :	323 390 12
Pair M10 :	323 396 14	Pair M10 :	323 398 14
Pair ED10 :	323 397 14	Pair ED 10 :	323 399 14

RIMS	COMMERCIAL REFERENCES : Do not use rim tape Front clincher : 323 488 10 Front tubular : 323 489 10 Rear clincher : 323 488 13 Rear tubular : 323 489 13	
	VALVE HOLE Ø Ø : 6,5 mm Length. : = 32 mm 	RECOMMENDED TIRE WIDTH AND PRESSURE Dimensions : Ø 700 only Compatible ETRTO 622 x 13 Recommended tire width : 19 - 28 
HUBS	MAINTENANCE : Clean with dry cloth or soap and water. Do not use pressurized water. Caution : The parts on the FTS-L free wheel (pawl assembly, springs, free wheel body) are not compatible with those on the FTS free wheels.	
		
		
WHEEL BUILDING	REFERENCE : Front : 323 456 01, length 281 mm (per 9) Rear FWS : 323 457 01, length 272 mm (per 10) Rear OFW : 323 458 01, length 301 mm (per 10)	
FEATURES : Silver, flat, oversized, zicral, straight pull spokes. Integrated aluminum nipple with polypropylene brake ring (anti-rotation).	LACING PATTERN : Front : Radial Rear : Isopulse concept 	TENSION : Front : 100 - 130 kg Rear free wheel side : 130 - 160 kg
ACCESSORIES	WHEEL DELIVERED WITH : <ul style="list-style-type: none"> • Front quick release skewer BR601 : M40149 • Rear quick release skewer BR 601 : M401500 • Chain Disc (with rear wheel) • Computer magnet M40540 (with front wheel) • Free play adjustment wrench : M40123 (with rear wheel) • Spoke tension and maintenance wrench : M40494 ((with rear wheel) • User guide and warranty card 	MAINTENANCE
		For all maintenance procedures (removing the front hub, removing the rear hub, replacing a spoke or rim), refer to our website www.tech-mavic.com or our 2003 technical manual (section concerning the Crossmax SL).