

KSYRIUM™ ELITE

USE: Use only on a road bike. Any other use (such as on a tandem, Cyclo-Cross bike, mountain bike...) is strongly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

WEIGHT Ø 700:

Front: 772 g
Rear: 960 g (ED10)

REFERENCES:





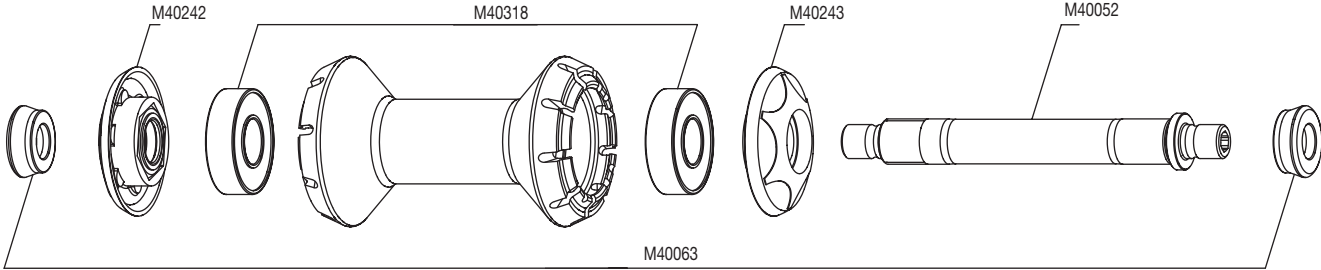
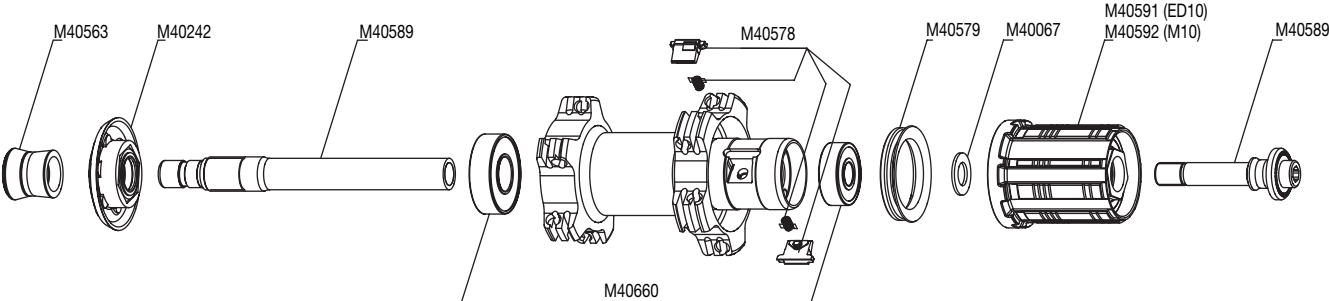
Front: 323 625 10
Rear M10: 323 626 11
Rear ED10: 323 627 12
Pair M10: 323 739 14
Pair ED10: 323 740 14

WEIGHT Ø 650:

Front: 722 g
Rear: 908 g (ED10)

REFERENCES:

Front: 323 635 10
Rear M10: 323 636 11
Rear ED10: 323 637 12
Pair M10: 323 722 14
Pair ED10: 323 744 14

RIMS	SALES REFERENCES: 700: Front: 323 911 10 Rear: 323 911 13 650: Front: 323 910 10 Rear: 323 910 13	
WIDTH 	VALVE HOLE Ø Ø: 6,5 mm Length: ≥ 32 mm 	RECOMMENDED TIRE WIDTH AND PRESSURE Dimensions: Ø 700 or 650 Compatible ETRTO 622 x 13 (700) or 571x13 (650) Recommended tire width: 19 to 28  Recommended tire pressure: See page 16 
HUBS	MAINTENANCE: Clean with dry cloth or soap and water. Do not use pressurized water. Warning: The parts of the FTS-L free wheels (pawl assembly, springs, free wheel body) are not compatible with those on the FTS free wheels.	
		
		
WHEEL BUILDING	REFERENCES AND LENGTHS: Front 700: 323,898 01, length 287 (per 9, integrated nipples). Rear 700: 323,899 01, length 307 (per 10, integrated nipples). Front 650: 323,896 01, length 262 (per 9, integrated nipples). Rear 650: 323,897 01, length 282 (per 10, integrated nipples).	
FEATURES: Silver, ultra bladed, stainless steel, straight pull spokes with integrated M7 nipples (self-locking).	LACING PATTERN: Front: Radial Rear: Crossed 2 on both sides.	TENSION: Front: 115 to 135 kg Rear free wheel side: 140 to 165 kg
ACCESSORIES	WHEEL DELIVERED WITH:	MAINTENANCE
<ul style="list-style-type: none"> • Front quick release skewer M40350 • Rear quick release skewer M40351 • Free play adjustment wrench M40123 (with rear wheel) • Wrench for aerodynamic spokes M40567 (with rear wheel) • ED10 12D locking ring M40640 (with rear wheel ED10) • User guide and warranty card 		<ul style="list-style-type: none"> • Replacing a spoke See page 23 • Replacing the front rim See page 24 • Replacing the rear rim See page 27 <p>Hubs: For all maintenance procedures (replacement of an axle, bearings, free wheel body), refer to the 2002 technical manual or to our website www.tech-mavic.com.</p>