

KSYRIUM™ ELITE 700

USE: use only on a road bike. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is strongly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

WHEEL WEIGHTS WITHOUT QUICK RELEASE SKEWER:




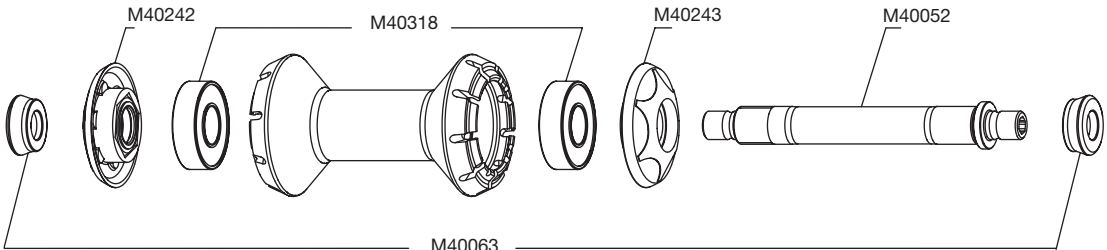
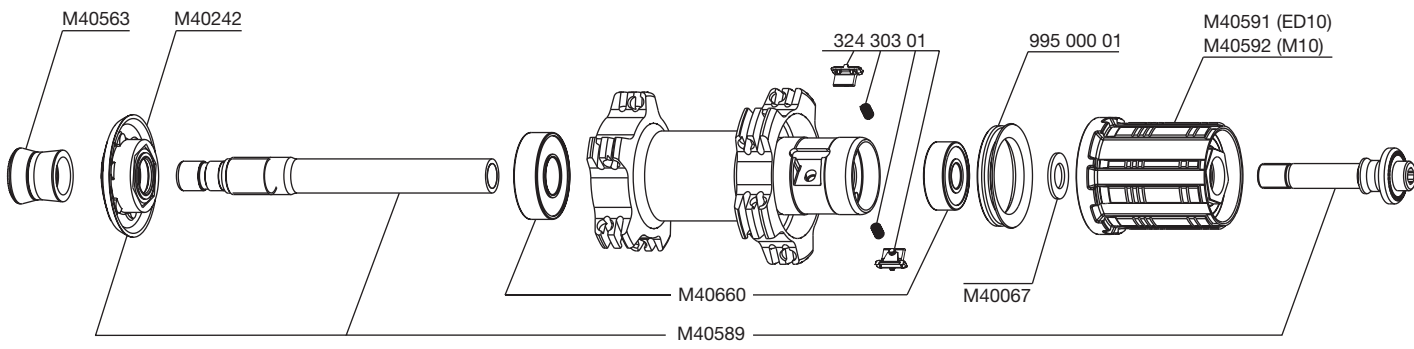
Front: 775 g
Rear M10: 975 g
Rear ED10: 960 g

BLACK WHEEL REFERENCES:

Front: 324 013 10
Rear M10: 324 014 11
Rear ED10: 324 015 12
Pair M10: 324 107 14
Pair ED10: 324 108 14

SILVER WHEEL REFERENCES:

Front: 323 625 10
Rear M10: 323 626 11
Rear ED10: 323 627 12
Pair M10: 324 740 14
Pair ED10: 324 739 14

RIMS	<p>SALES REFERENCES: Black: Front: 324 173 10 Silver: Front: 323 911 10 Rear: 324 173 13 Rear: 323 911 13</p>	
WIDTH	<p>VALVE HOLE Ø</p>  <p>Ø: 6,5 mm Length.: ≥ 32 mm</p>	<p>RECOMMENDED TIRE WIDTH AND PRESSURE</p>  <p>Dimensions: Ø 700 only ETRTO 622 x 13 compatible Recommended tire width: 19 to 28</p>  <p>Recommended tire pressure: See page 14</p>
	<p>When replacing the rear rim: 1. With the valve hole near you, the 2 raised indicator bumps must be to the right of the valve hole 2. The spoke in the first hole to the right of the valve hole should be inserted on the free wheel side</p>	
HUBS	<p>MAINTENANCE: clean with dry cloth or soap and water Do not use pressurized water</p>	
		
		
WHEEL BUILDING	<p>REFERENCES AND LENGTHS: Black front: 324 184 01, length 287 mm (per 9, integrated nipples) Black rear: 324 185 01, length 307 mm (per 10, integrated nipples) Silver front: 323 898 01, length 287 mm (per 9, integrated nipples) Silver rear: 323 899 01, length 307 mm (per 10, integrated nipples)</p>	
	<p>FEATURES: Silver or black, ultra bladed, stainless steel, straight pull spokes with integrated M7 nipples (self-locking)</p>	<p>LACING PATTERN: Front: radial Rear: crossed 2 on both sides</p>
	<p>TENSION : Front: 115 to 135 kg Rear free wheel side: 140 to 165 kg</p>	
ACCESSORIES	<p>WHEEL DELIVERED WITH:</p> <ul style="list-style-type: none"> • Traditional aluminum front quick release skewer M40350 • Traditional aluminum rear quick release skewer M40351 • M7 spoke wrench M40494 (with rear wheel) • Wrench for aerodynamic spokes M40567 (with rear wheel) • ED10 12D locking ring (with rear wheel ED10) • Free play adjustment wrench M40123 (with rear wheel) • User guide and warranty card 	MAINTENANCE
	<p>For all maintenance procedures (hubs, spoke lacing...), refer to the 2002 technical manual (hubs) and 2005 technical manual (spoke lacing), or consult the website www.tech-mavic.com</p>	

WHEELS