

CROSSMAX™ ENDURO DISC

Disc fixing:
"Center Lock"





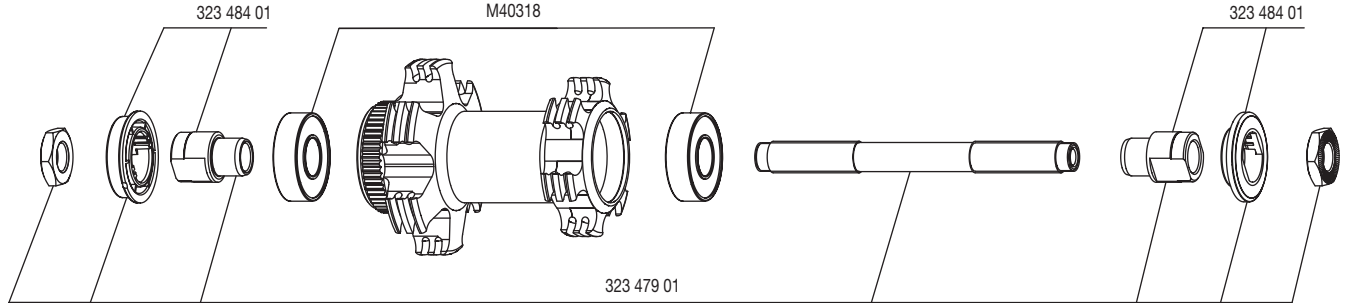
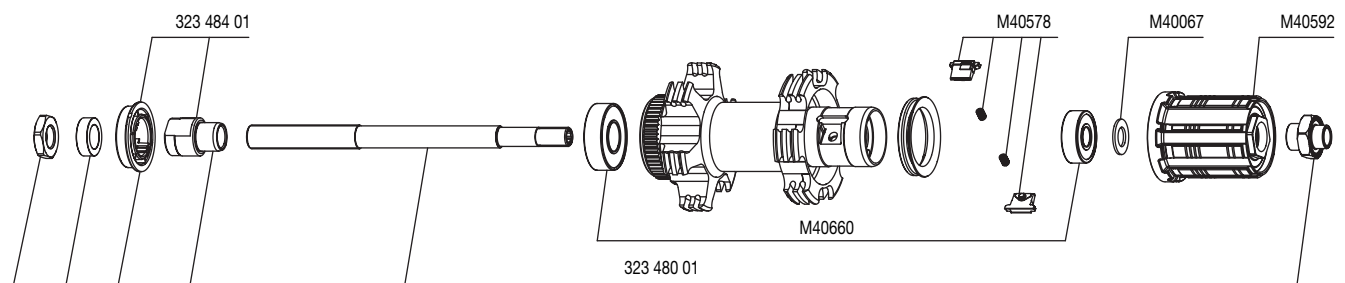
USE: Use only on a Cross Mountain or Cross Country MTB fitted with disc brakes. Any other use (such as on a tandem, Cyclo-Cross bike, road bike, downhill bike...) is strongly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

WHEEL WEIGHTS WITHOUT QUICK RELEASE SKEWER:

Front: 850 g
Rear: 985 g

REFERENCES:

Front: 323 682 10
Rear: 323 683 13
Pair: 323 755 14

RIMS		SALES REFERENCES: (applicable to Crossmax Enduro Disc International Standard and Crossmax Enduro Disc Center lock wheels) Front: 323 494 10 / Rear: 323 494 13	
WIDTH		VALVE HOLE Ø  Ø: 6,5 mm UST valve + Schrader adapter: M40495 Length: ≥ 32 mm	RECOMMENDED TIRE WIDTH AND PRESSURE  Dimensions: Ø 26" only Compatible ETRTO 559 x 19 Recommended tire width: 1,00 to 2,30  Recommended tire pressure: See page 16
HUBS		MAINTENANCE: Clean with dry cloth or soap and water. Do not use pressurized water. Warning: The parts of the FTS-L free wheels (pawl assembly, springs, free wheel body) are not compatible with those on the FTS free wheels.	
			
			
WHEEL BUILDING		REFERENCES AND LENGTHS: Front and rear: 323 440 01, length 273 (per 12, integrated nipples).	
FEATURES: Silver, ultra bladed, stainless steel, straight pull spokes with integrated M7 nipples (self-locking).		LACING PATTERN: Front and rear: crossed 2 on both sides	
		TENSION: Front: 100 to 120 kg Rear free wheel side: 110 to 130 kg	
ACCESSORIES		MAINTENANCE	
WHEEL DELIVERED WITH: <ul style="list-style-type: none"> • Front quick release skewer M40350 • Rear quick release skewer M40352 • UST Valve M40495 • User guide and warranty card Discs and disc locking rings not supplied.		For all maintenance procedures (hubs, spoke lacing), refer to the 2004 technical manual or consult the website www.tech-mavic.com . For all specifications concerning the assembly of the disc on the hub, refer to the technical documents supplied by Shimano®.	