
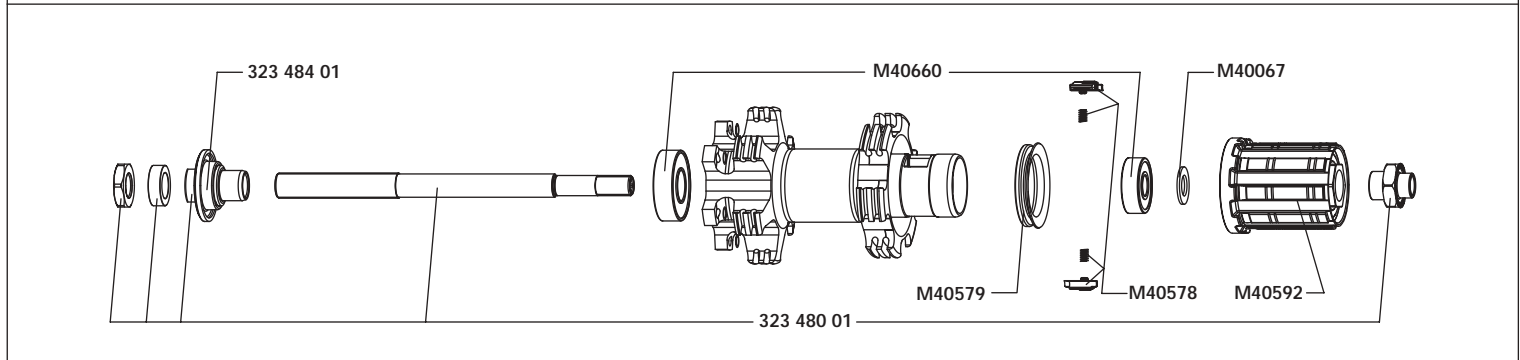
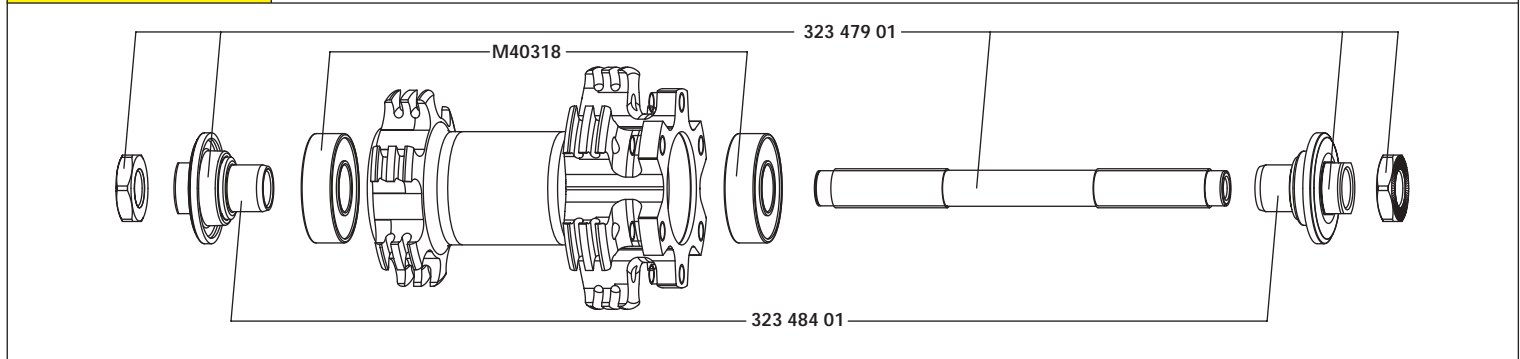


CROSSMAX™ ENDURO DISC

<p>USE : Use only on a cross-country MTB equipped with disc brakes. Any other use (such as on an MTB equipped with rim brakes, on a tandem, road bike, cyclo-cross bike...) is strongly inadvisable, and is the sole responsibility of the user, which voids the Mavic warranty.</p>	<p>WHEEL WEIGHT WITHOUT SKEWER : Front : 850 g Rear : 985 g</p>	<p>WHEEL REF : Front : 323 345 10 Rear : 323 346 13 Pair : 323 414 14</p>
---	--	---

<p>RIMS</p> 	<p>COMMERCIAL REFERENCES : do not use rim tape Front : 323 494 10 Rear : 323 494 13</p> <p>VALVE HOLE Ø Ø : 6,5 mm Length. : = 32 mm</p> 	<p>RECOMMENDED TIRE WIDTH AND PRESSURE</p> <p>Dimensions : Ø 26" only Compatible ETRTO 559 x 19 Recommended tire width : 1,00 - 2,30</p>  <p>Recommended tire pressure : See page 05</p> 
--	--	--

HUBS **MAINTENANCE :** Clean with dry cloth or soap and water. Do not use pressurized water.
Caution : The parts on the FTS-L free wheels (pawl assembly, springs, free wheel body) are not compatible with those on the FTS free wheels.



<p>WHEEL BUILDING</p> <p>FEATURES : 2,3 - 2,0 black, round, double butted, stainless steel, straight pull spokes, with ABS type of nipples (self-locking).</p>	<p>REFERENCE : Front and rear : 323 440 01, length 273 mm (per 12)</p> <p>LACING PATTERN : Front : Crossed 2 on both sides Rear : Crossed 2 on both sides</p>	<p>TENSION : Front disc side : 100 - 120 kg Rear free wheel side : 110 - 130 kg</p>
---	--	--

<p>ACCESSORIES</p> <p>WHEEL DELIVERED WITH :</p> <ul style="list-style-type: none"> • Front quick release skewer M40350 • Rear quick release skewer M40352 • UST valve M40495 • User guide and warranty card 	<p>MAINTENANCE</p> <ul style="list-style-type: none"> • Replacing the front axle • Replacing the front bearings • Replacing the rear axle • Replacing the free wheel body • Replacing the rear bearings • Replacing a spoke • Replacing the front rim • Replacing the rear rim <p>See page 19 See page 19 See page 20 See page 21 See page 22 See page 25 See page 28 See page 29</p>
--	---