




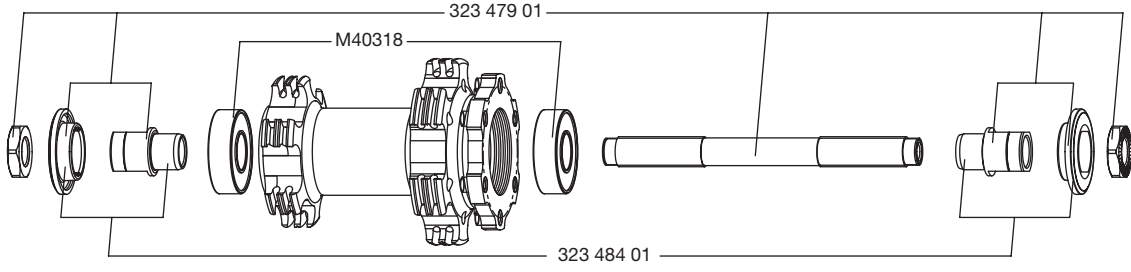
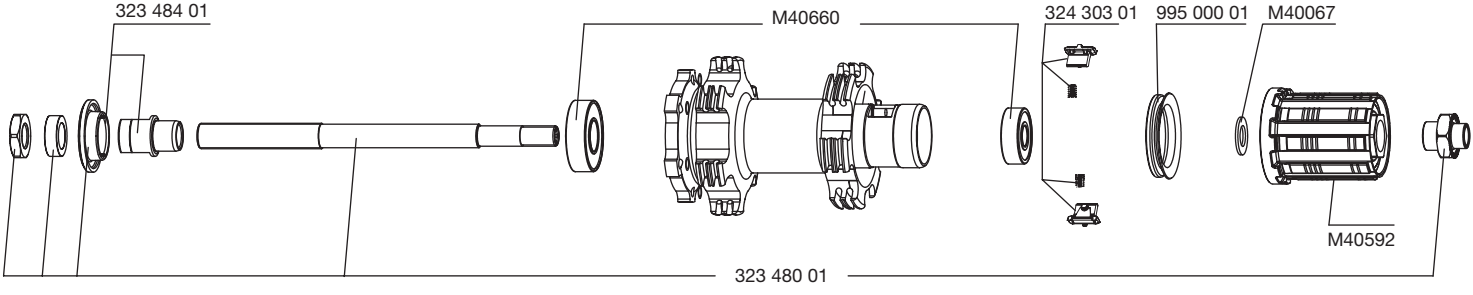
# CROSSRIDE

**USE:** use only on a Cross Country or Cross Mountain MTB. Any other use (such as on a tandem, road bike, cyclo-cross bike...) is strongly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

**WHEEL WEIGHTS WITHOUT QUICK RELEASE SKEWER:**  
 Front: 910 g  
 Rear: 1060 g

**BLACK WHEEL REFERENCES:**  
 Front: 323 983 10  
 Rear: 323 984 13  
 Pair: 324 100 14

**SILVER WHEEL REFERENCES:**  
 Front: 323 973 10  
 Rear: 323 974 13  
 Pair: 324 090 14

<b>RIMS</b>		<b>SALES REFERENCES:</b> Black (front and rear): 324 200 14      Silver (front and rear): 324 199 14	
<b>WIDTH</b> 	<b>VALVE HOLE Ø</b> 	<b>RECOMMENDED TIRE WIDTH AND PRESSURE</b>  	
<b>HUBS</b> <b>MAINTENANCE:</b> clean with dry cloth or soap and water Do not use pressurized water			
			
			
<b>WHEEL BUILDING</b>		<b>REFERENCES AND LENGTHS:</b> Black front and rear: 324 223 01, length 274 mm (per 12 with nipples) Silver front and rear: 324 222 01, length 274 mm (per 12 with nipples)	
<b>FEATURES:</b> Silver or black, profiled, stainless steel, straight pull spokes with ABS nipples (self-locking)		<b>LACING PATTERN:</b> Front: crossed 2 on both sides Rear: crossed 2 on both sides	
		<b>TENSION :</b> Front: 95 to 125 kg Rear free wheel side: 115 to 145 kg	
<b>ACCESSORIES</b>	<b>WHEEL DELIVERED WITH:</b>	<b>MAINTENANCE</b>	
<ul style="list-style-type: none"> <li>Traditional aluminum front quick release skewer: M40350</li> <li>Traditional aluminum rear quick release skewer: M40351</li> <li>Rim tape 559x20x0.6</li> <li>User guide and warranty card</li> </ul>		For all maintenance procedures, refer to the 2004 technical manual (Crossland section), or consult the website <a href="http://www.tech-mavic.com">www.tech-mavic.com</a>	

WHEELS